


WattPro Serial Compact Pressurized Solar Water Heaters

Key Points:


- ◆ 316L Stainless Steel Pocket
- ◆ SUS-304-2B Inner Tank and Outer Tank Shell
- ◆ Stronger Aluminum Alloy Bracket or SUS-304
- ◆ Optional: Watts P/T Valve, Anti-Vacuum Safety Valve
- ◆ Never Rust Al.Alloy Stand Frame

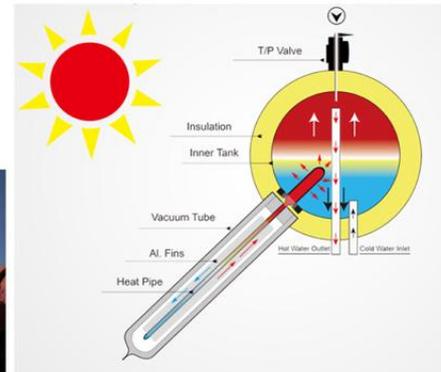

WattPro Solar Water Heater (Heat Pipe)			
Water Tank	1	Material of Outer Tank Shell	High Quality Stainless Steel Plate
	2	Material of Inner Tank Chest	Food Grade SUS304-2B SS/316L, 12~1.5mm
	3	Water Tank Diameter	【470/360 mm】
	4	Water Tank Insulating Layer	High Density Polyurethane, 【55mm】
	5	Tube Size	58*1800mm*10/15/20/25/30 Tubes
	6	Coating Material	Cu/SS-ALN(H)/SS-ALN (L)/ALN
Heat Pipe	7	Heat Pipe Material	TU1 Copper
	8	Heat Pipe Condenser Size	【Ø14mm Diameter】 【80mm Length】
	9	Riwatt Heat Pipe Pocket	【316L STAINLESS STEEL】
	10	Max.Working Temp	-37 ~250C
Bracket	11	Bracket Material	Stronger Aluminum Alloy 【9CM Width】
	12	Bracket Angle	45°
	13	Bolts & Nuts	Stainless Steel



MODEL	Vacuum Tube		Capacity	Absorb er Area	Suitable for	Container Load(set)	
	Pcs	Size(mm)	Inner Tank(L)	(M2)	(Persons)	20'GP	40'HQ
WATTPRO-10	10	58×1800	100	1.330	3	58	142
WATTPRO-15	15	58×1800	140	1.995	4~5	49	118
WATTPRO-20	20	58×1800	180	2.660	6~7	37	89
WATTPRO-25	25	58×1800	215	3.325	9	28	69
WATTPRO-30	30	58×1800	255	3.990	10~11	25	62

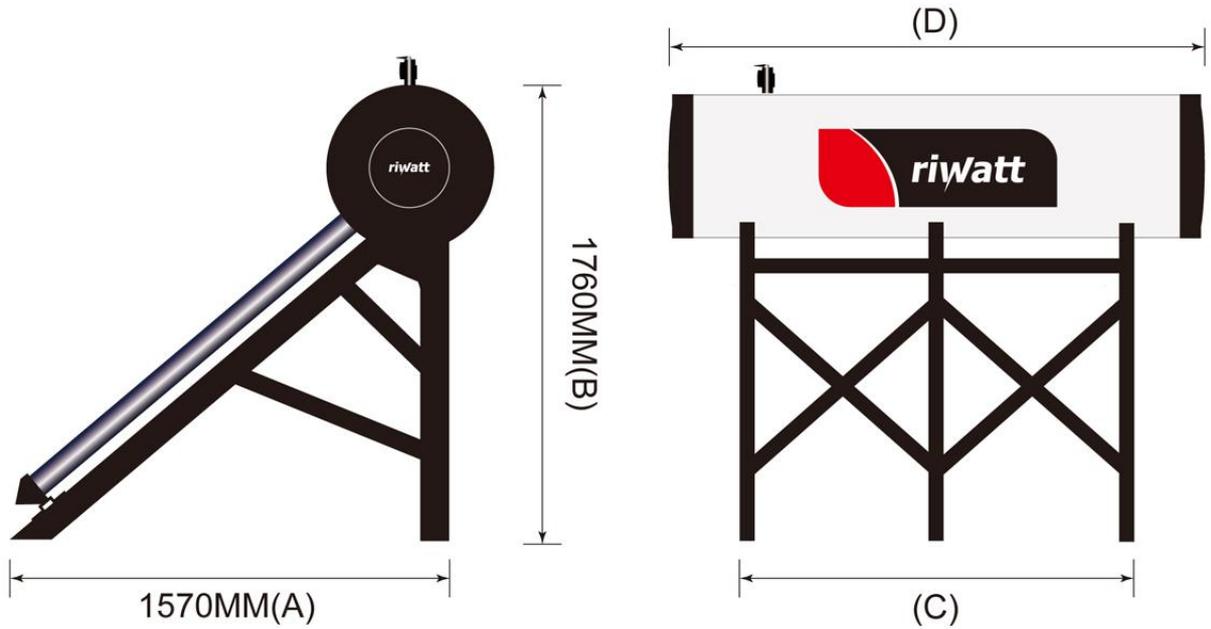

MODEL	A	B	C	D
WATTPRO-10	1570	1760	770	1095
WATTPRO-15	1570	1760	1145	1470
WATTPRO-20	1570	1760	1520	1845
WATTPRO-25	1570	1760	1910	2245
WATTPRO-30	1570	1760	2270	2595

Remark: 1~3 cm tolerance might be existed, please note. Unit: MM

